



PLAN REVIEW SHEET


Date:	3/20/2013	Staff Contact:	Brian Horton
Petition:	2013-040 James P. Ngo & Yen M. Ngo	Telephone:	704-353-0018
		Email:	bhorton@charlottenc.gov
		Attachments:	Concrete Pad Specs


I. SUMMARY REMARKS:

We request that the Petitioner provide a waiting pad for bus service along Sugar Creek Road. The pad may be located 50 feet beyond the proposed Type II driveway, so that a stopped bus will not block the driveway.



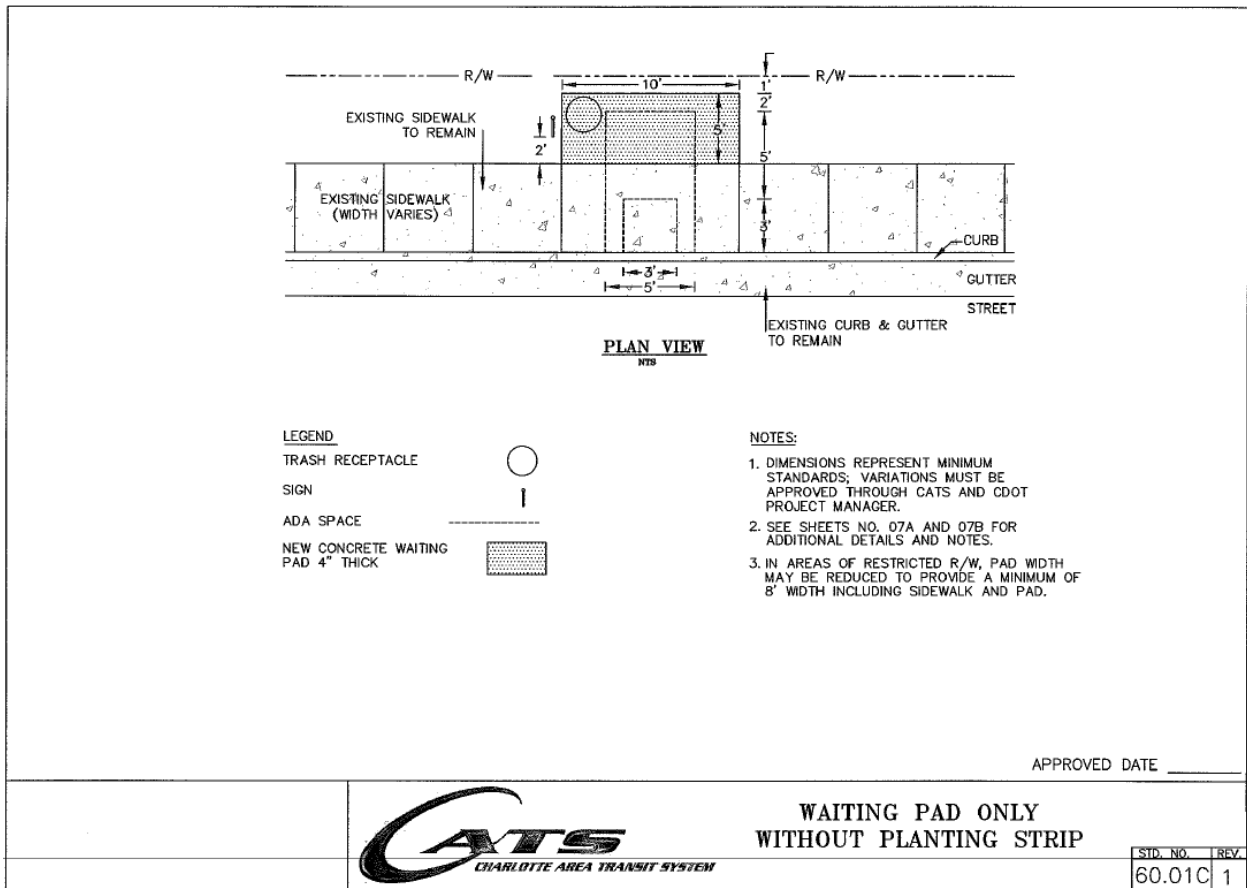

If back-of-curb sidewalk is retained, use the CATS pad standard detail 60.01C. If the new sidewalk includes planting strip, use the standard detail 60.01B. Below are images of each standard.

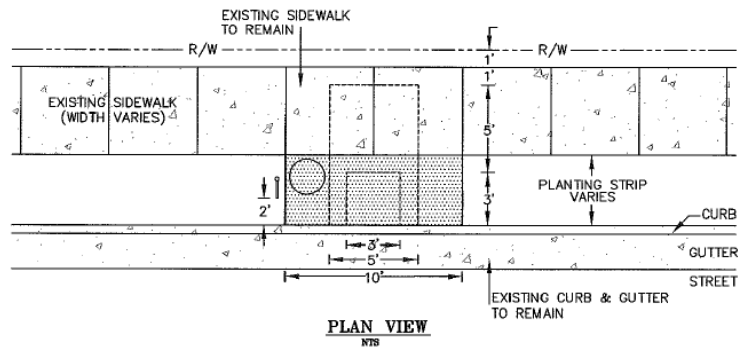Please contact me if there are any questions relative to this request. Thank you.





LEGEND

- TRASH RECEPTACLE 
- SIGN 
- ADA SPACE 
- NEW CONCRETE WAITING PAD 4" THICK 

NOTES:

1. DIMENSIONS REPRESENT MINIMUM STANDARDS; VARIATIONS MUST BE APPROVED THROUGH CATS AND CDOT PROJECT MANAGER.
2. SEE SHEETS NO. 07A AND 07B FOR ADDITIONAL DETAILS AND NOTES.
3. WIDTH OF SIDEWALK PLUS PLANTING STRIP MUST EQUAL 8'. IF WIDTH IS LESS THAN 8', EXISTING SIDEWALK MUST BE REPLACED WITH WIDER SIDEWALK TO OBTAIN 8'.

APPROVED DATE _____



**WAITING PAD ONLY
WITH PLANTING STRIP
STANDARD**

STD. NO.	REV.
60.01B	1