Charlotte Historic District Co Staff Review HDC 2016-326	ommission	Application for a Certificate of Appropriateness Date: January 11, 2017 PID# 15502221
LOCAL HISTORIC DISTRICT:	Hermitage Court	
PROPERTY ADDRESS:	400 Hermitage Cour	t
SUMMARY OF REQUEST:	Detached garage	
APPLICANT:	Michelle Berry	

Details of Proposed Request

Existing Conditions

The existing site is a corner lot at Hermitage Court and Providence Road. The site is elevated approximately 4 to 5 feet along Providence Road. The principal structure is a two story house constructed in 1999. The house is approximately 28' in height measure from FFE. The house was approved for a renovation by the HDC in 2014, COA# 2014-266.

Proposal

The project is a detached garage in the rear yard. The large mature tree in the rear yard will remain. Access to the garage is from an existing driveway on Hermitage Court. Materials are wood shake and lap siding. The roof design, slope and architectural details reflect the design of the house. The garage footprint is approximately 22' x 26'.

Policy & Design Guidelines – Accessory Buildings: Garages, page 50

Although the main building on a lot makes the strongest statement about a property's contribution to the character of a Local Historic District, the accessory buildings that share the lot can also have a significant impact on the streetscape. The Historic District Commission recognizes that many of the older support buildings throughout Charlotte's older neighborhoods are inadequate to meet the needs of today's families and businesses.

- 1. New garages cannot be located in front or side yards.
- 2. New garages must be constructed using materials and finishes that are in keeping with the main building they serve, and that are appropriate to the district.
- 3. Designs for new garages must be inspired by the main building they serve. Building details should be derived from the main structure.
- 4. Garages must be of a proper scale for the property, and must have an appropriate site relation to the main structure on a lot and to structures on surrounding properties.
- 5. Garage doors that are substantially visible from any street must be of a style and materials that are appropriate to the building and the district. Stamped metal and vinyl doors are considered to be inappropriate, and are discouraged.

Staff Analysis

The Commission will determine if the proposal meets the guidelines for garages.

SQUARE FOOTAGES

GARAGE FLOOR	=	556 sf
SECOND FLOOR (UNFINISHED)	=	489 sf



SEED, PLLC MATTHYS BARKER, PE P.O. BOX 691071 CHARLOTTE, NC CHARLOTTE, NC 28227-7018 704-239-0478



BERRY GARAGE

INDEX OF SHEETS


- COVER SHEET A1.0
- SITE PLAN A2.0
- GARAGE FLOOR PLANS A2.1
- GARAGE ELEVATIONS A3.0
- GARAGE ELEVATIONS A3.0b
- GARAGE ELEVATIONS A3.1




COX ARCHITECTURE & DESIGN, PLLC R. CRAIG COX, AIA 1810 EAST SEVENTH ST. CHARLOTTE, NC 28204 704-351-2576 WWW.COXARCHITECTURE.COM CRAIG@COXARCHITECTURE.COM


REFINED RENOVATIONS TIM GELORME 704-905-2247




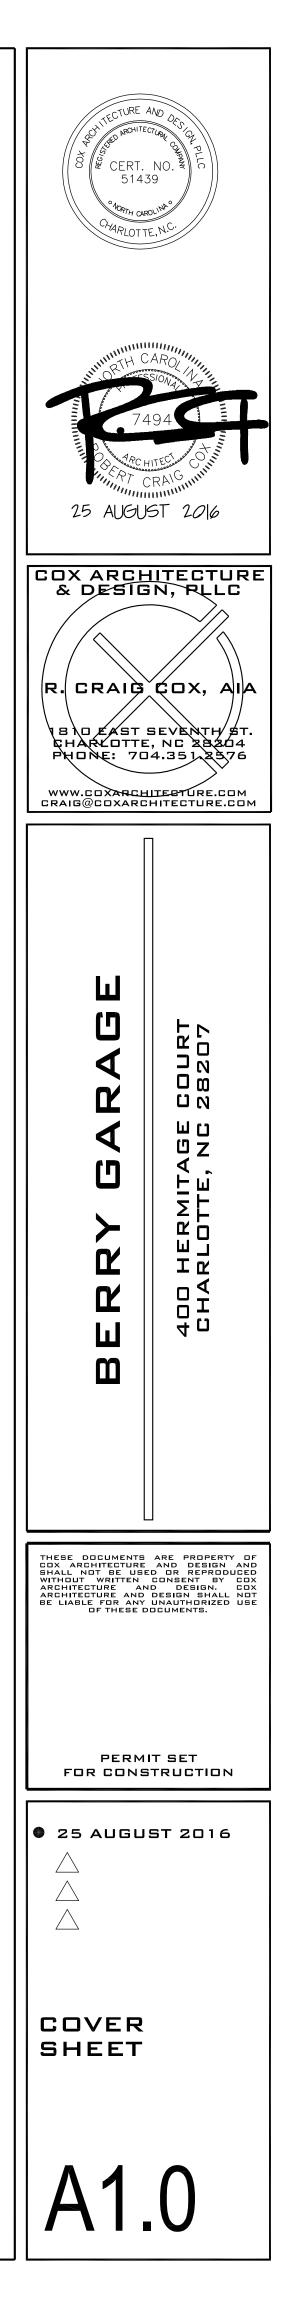





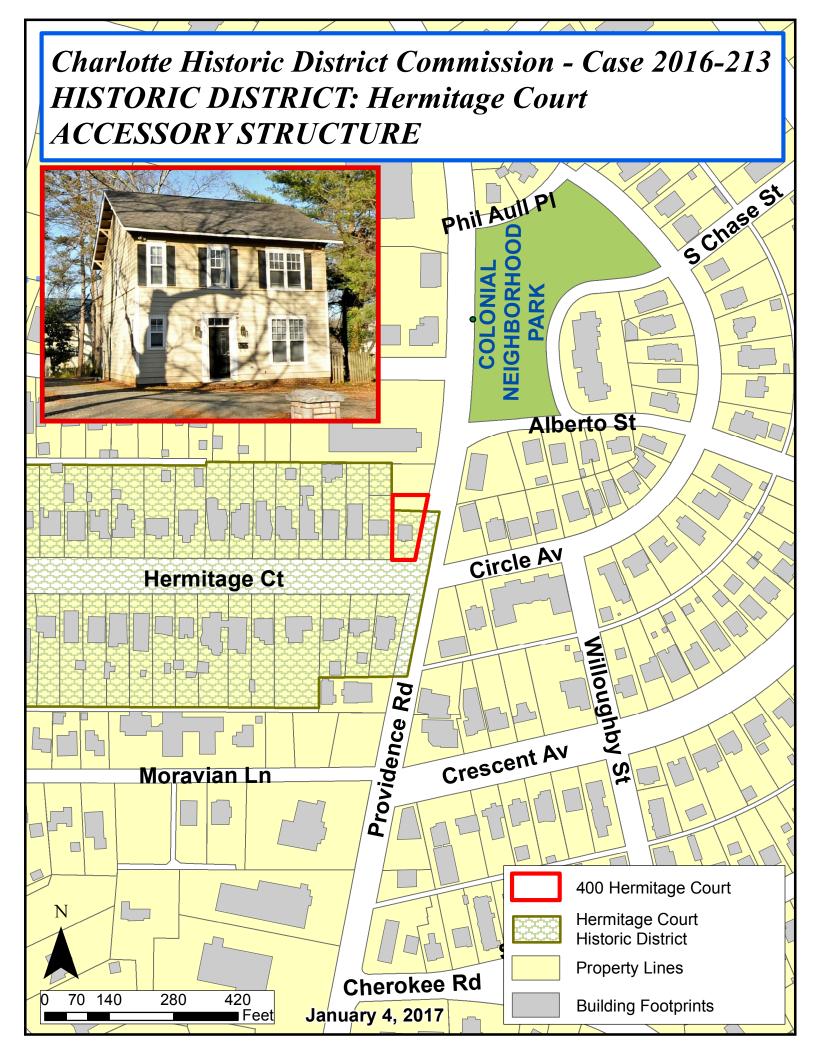


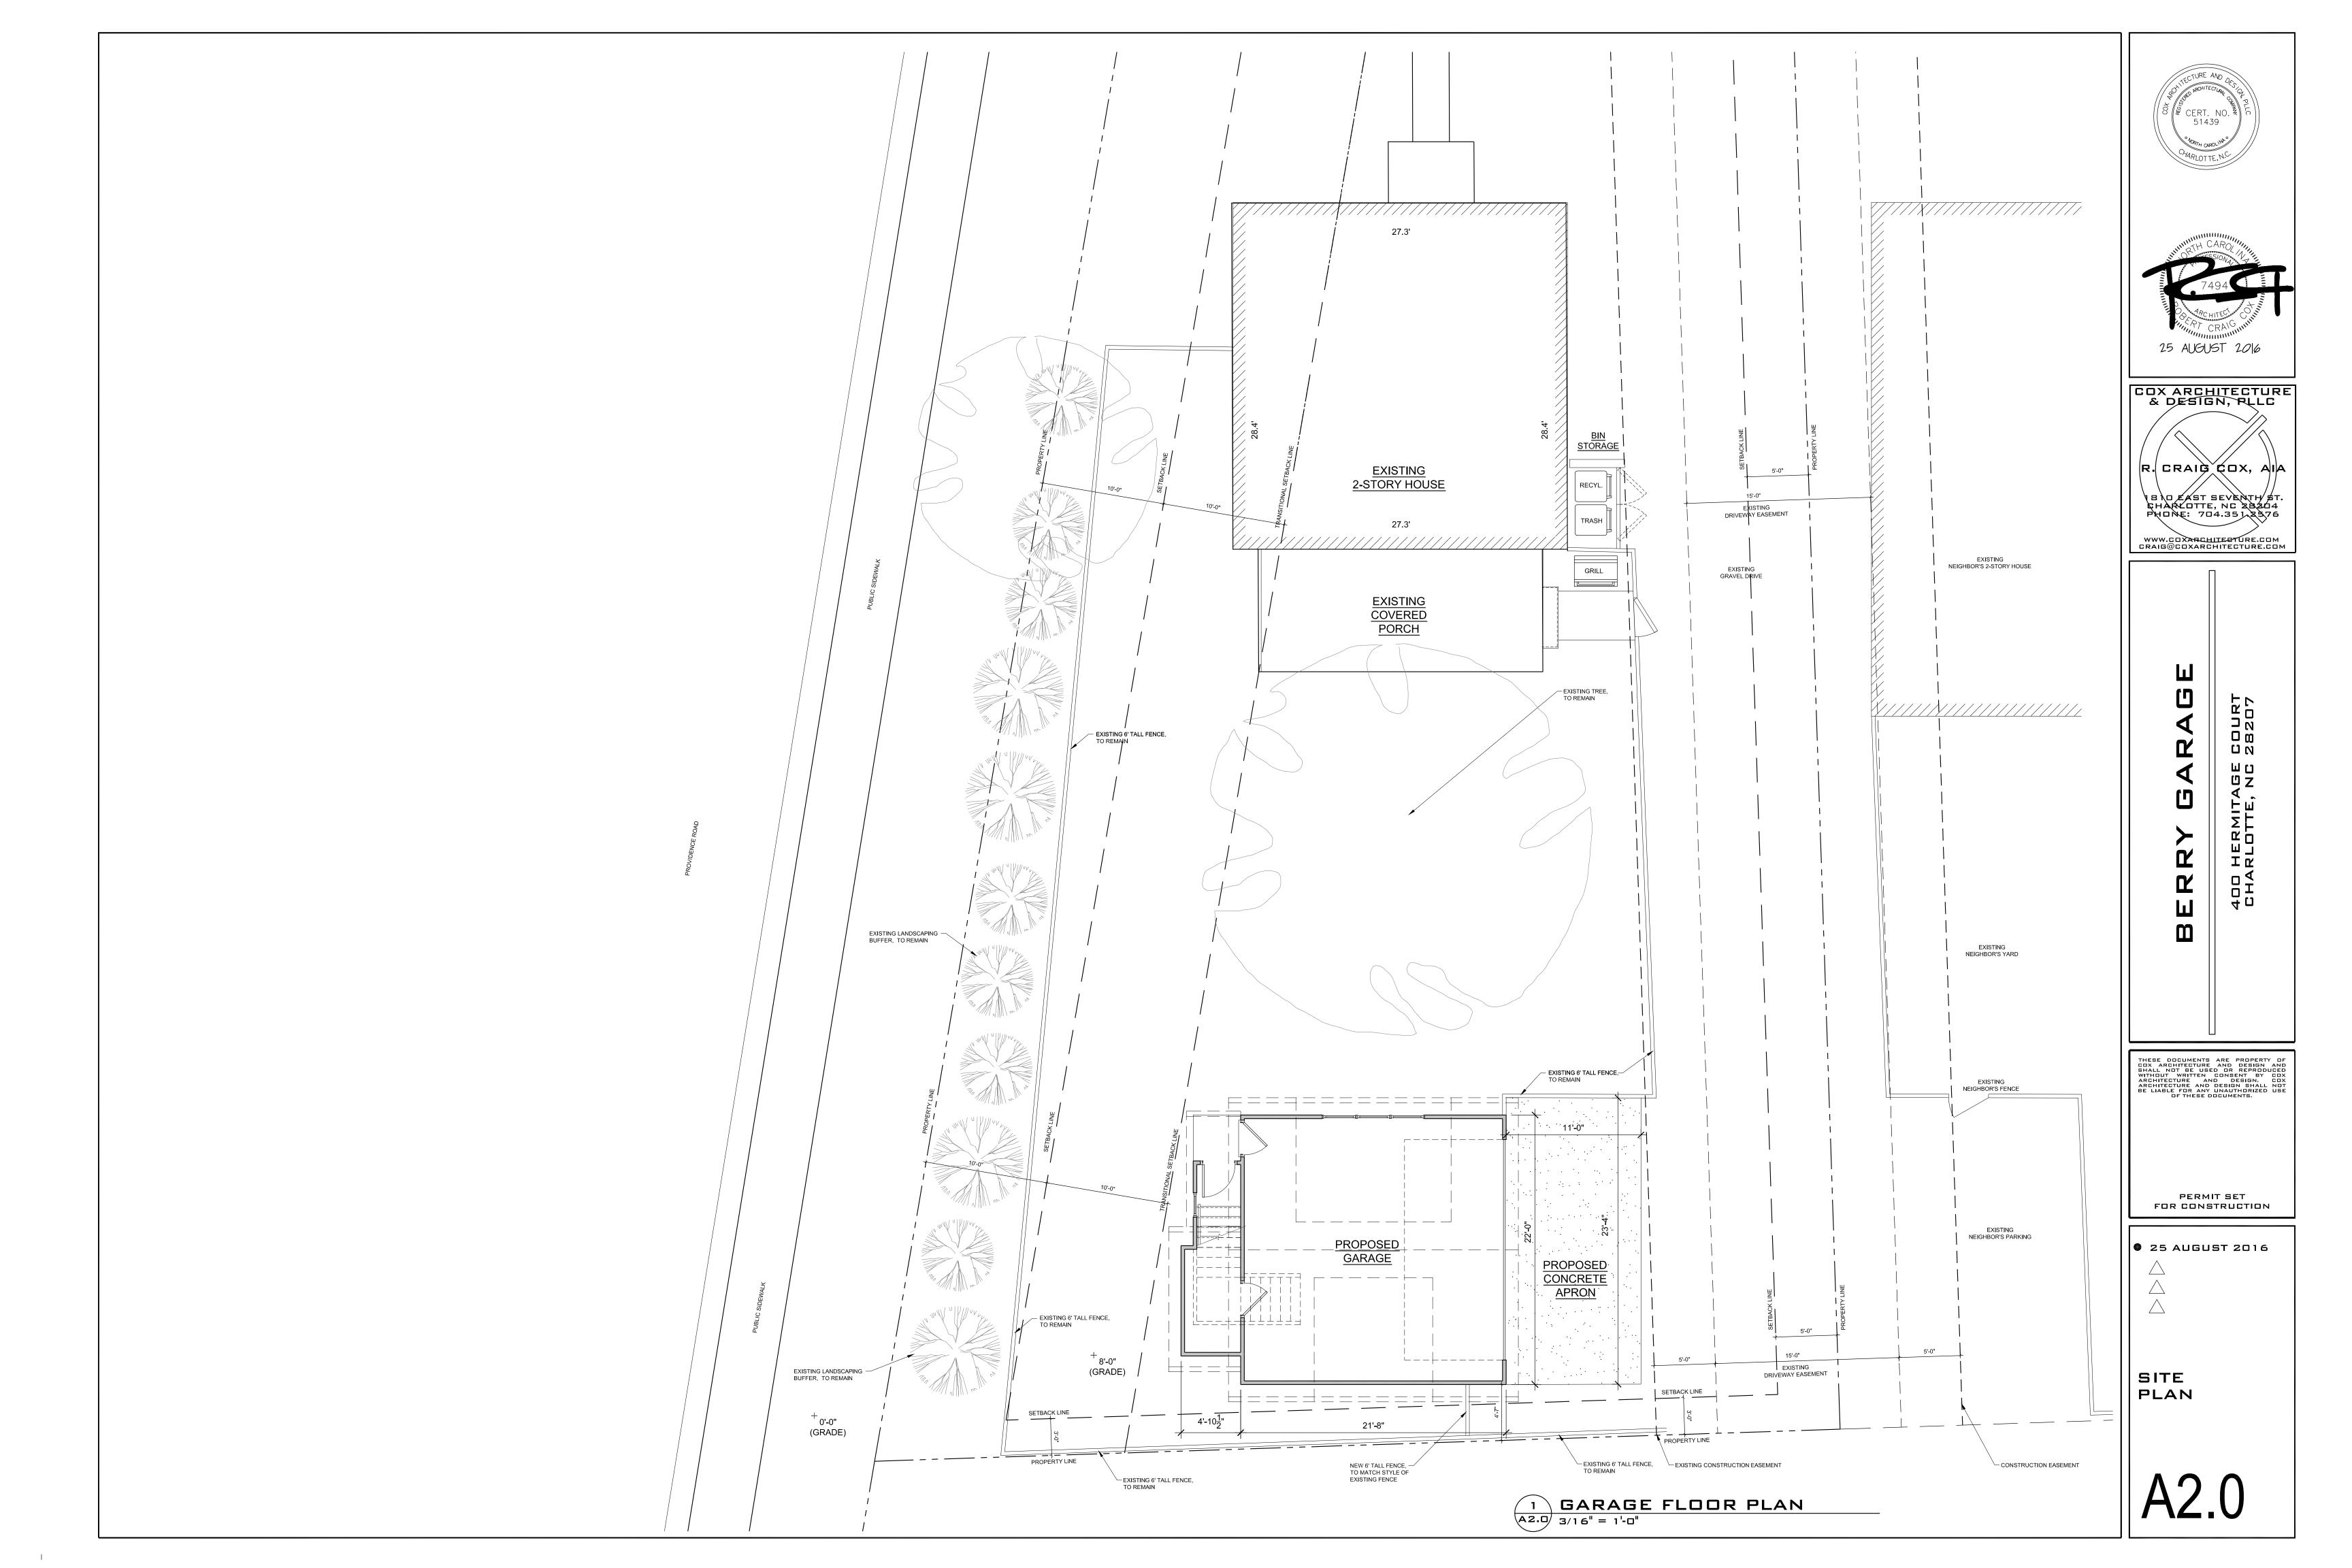

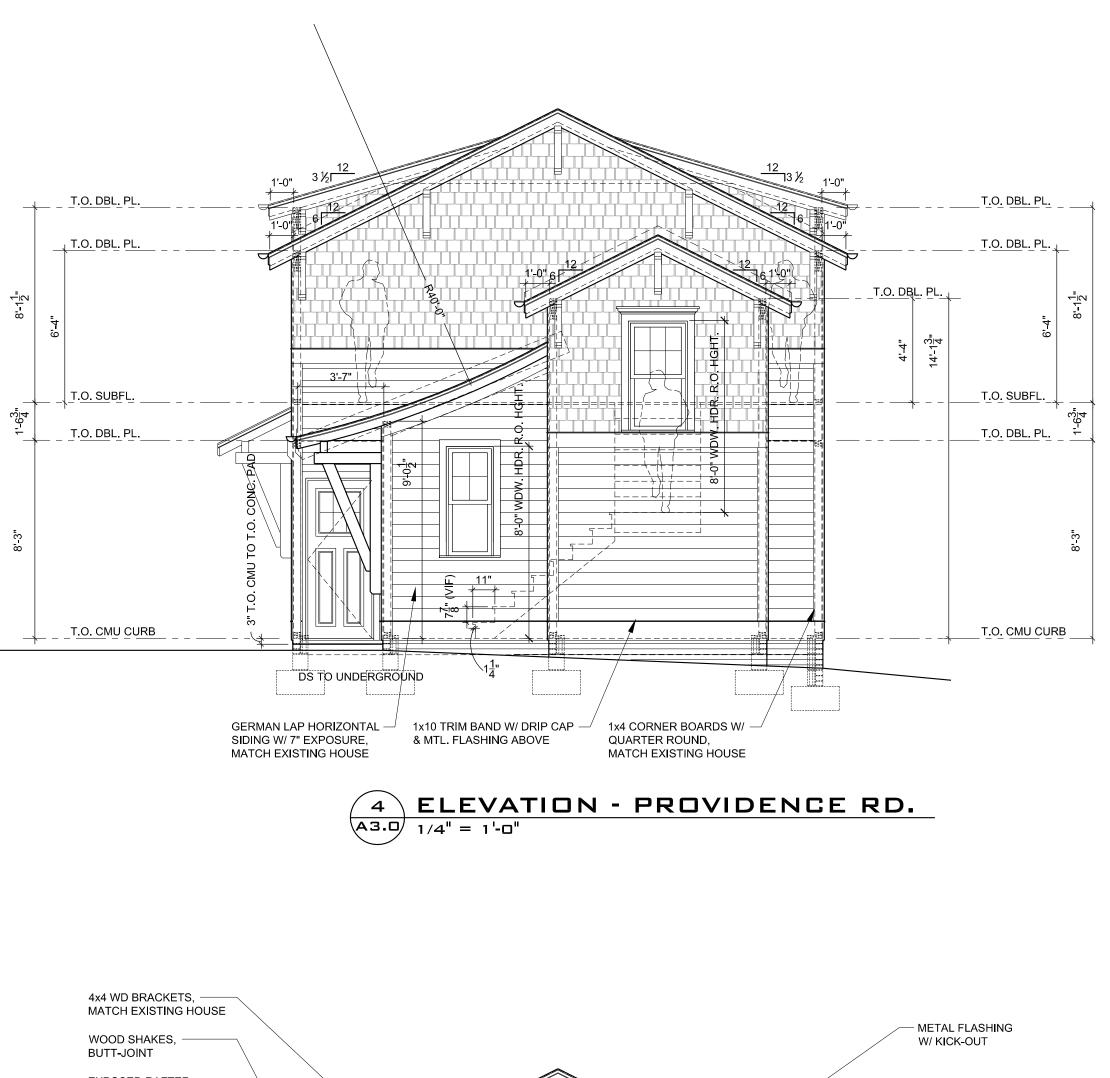

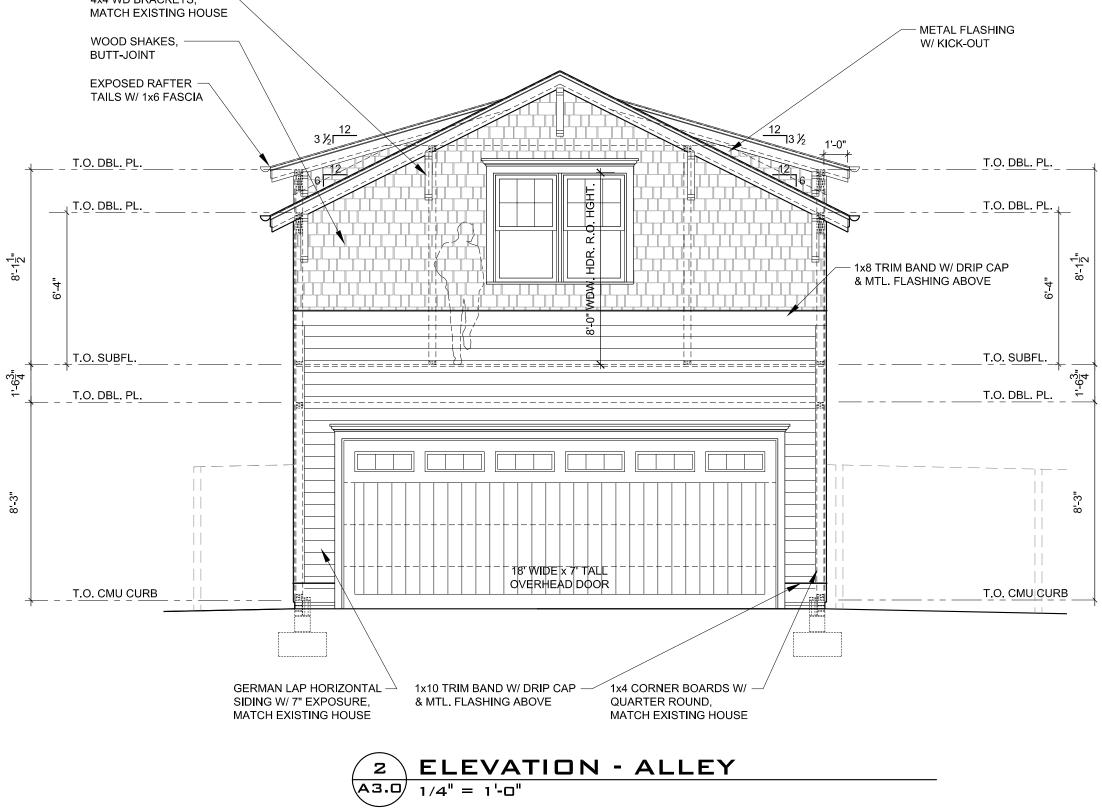

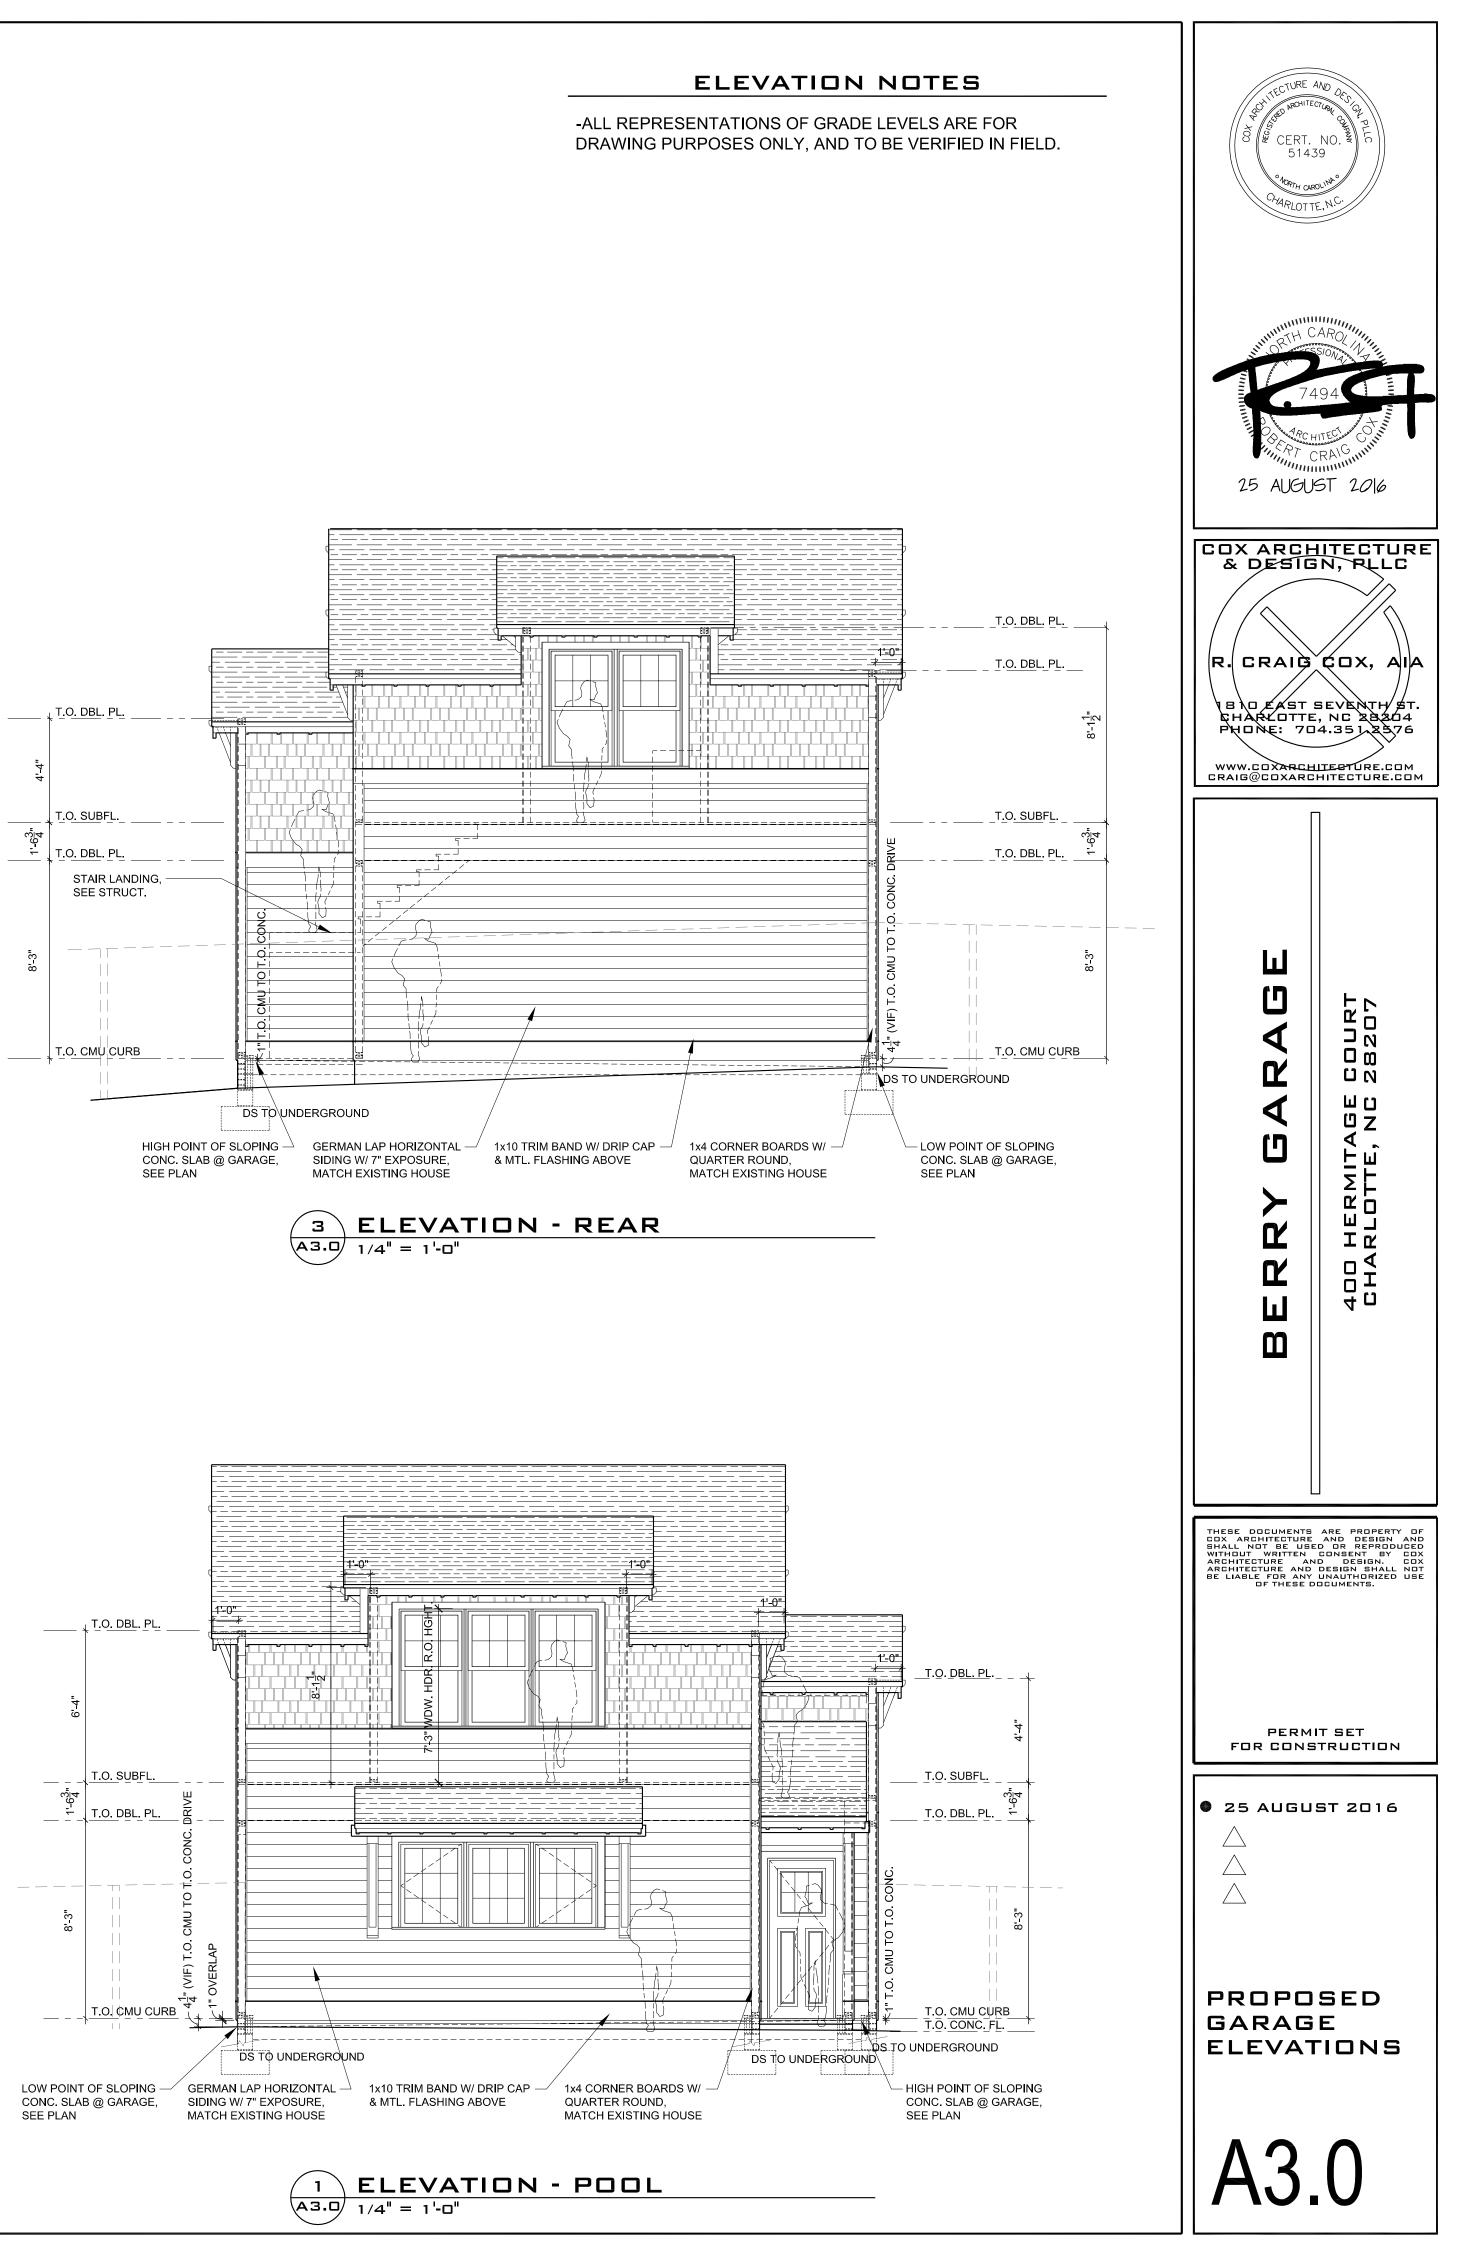

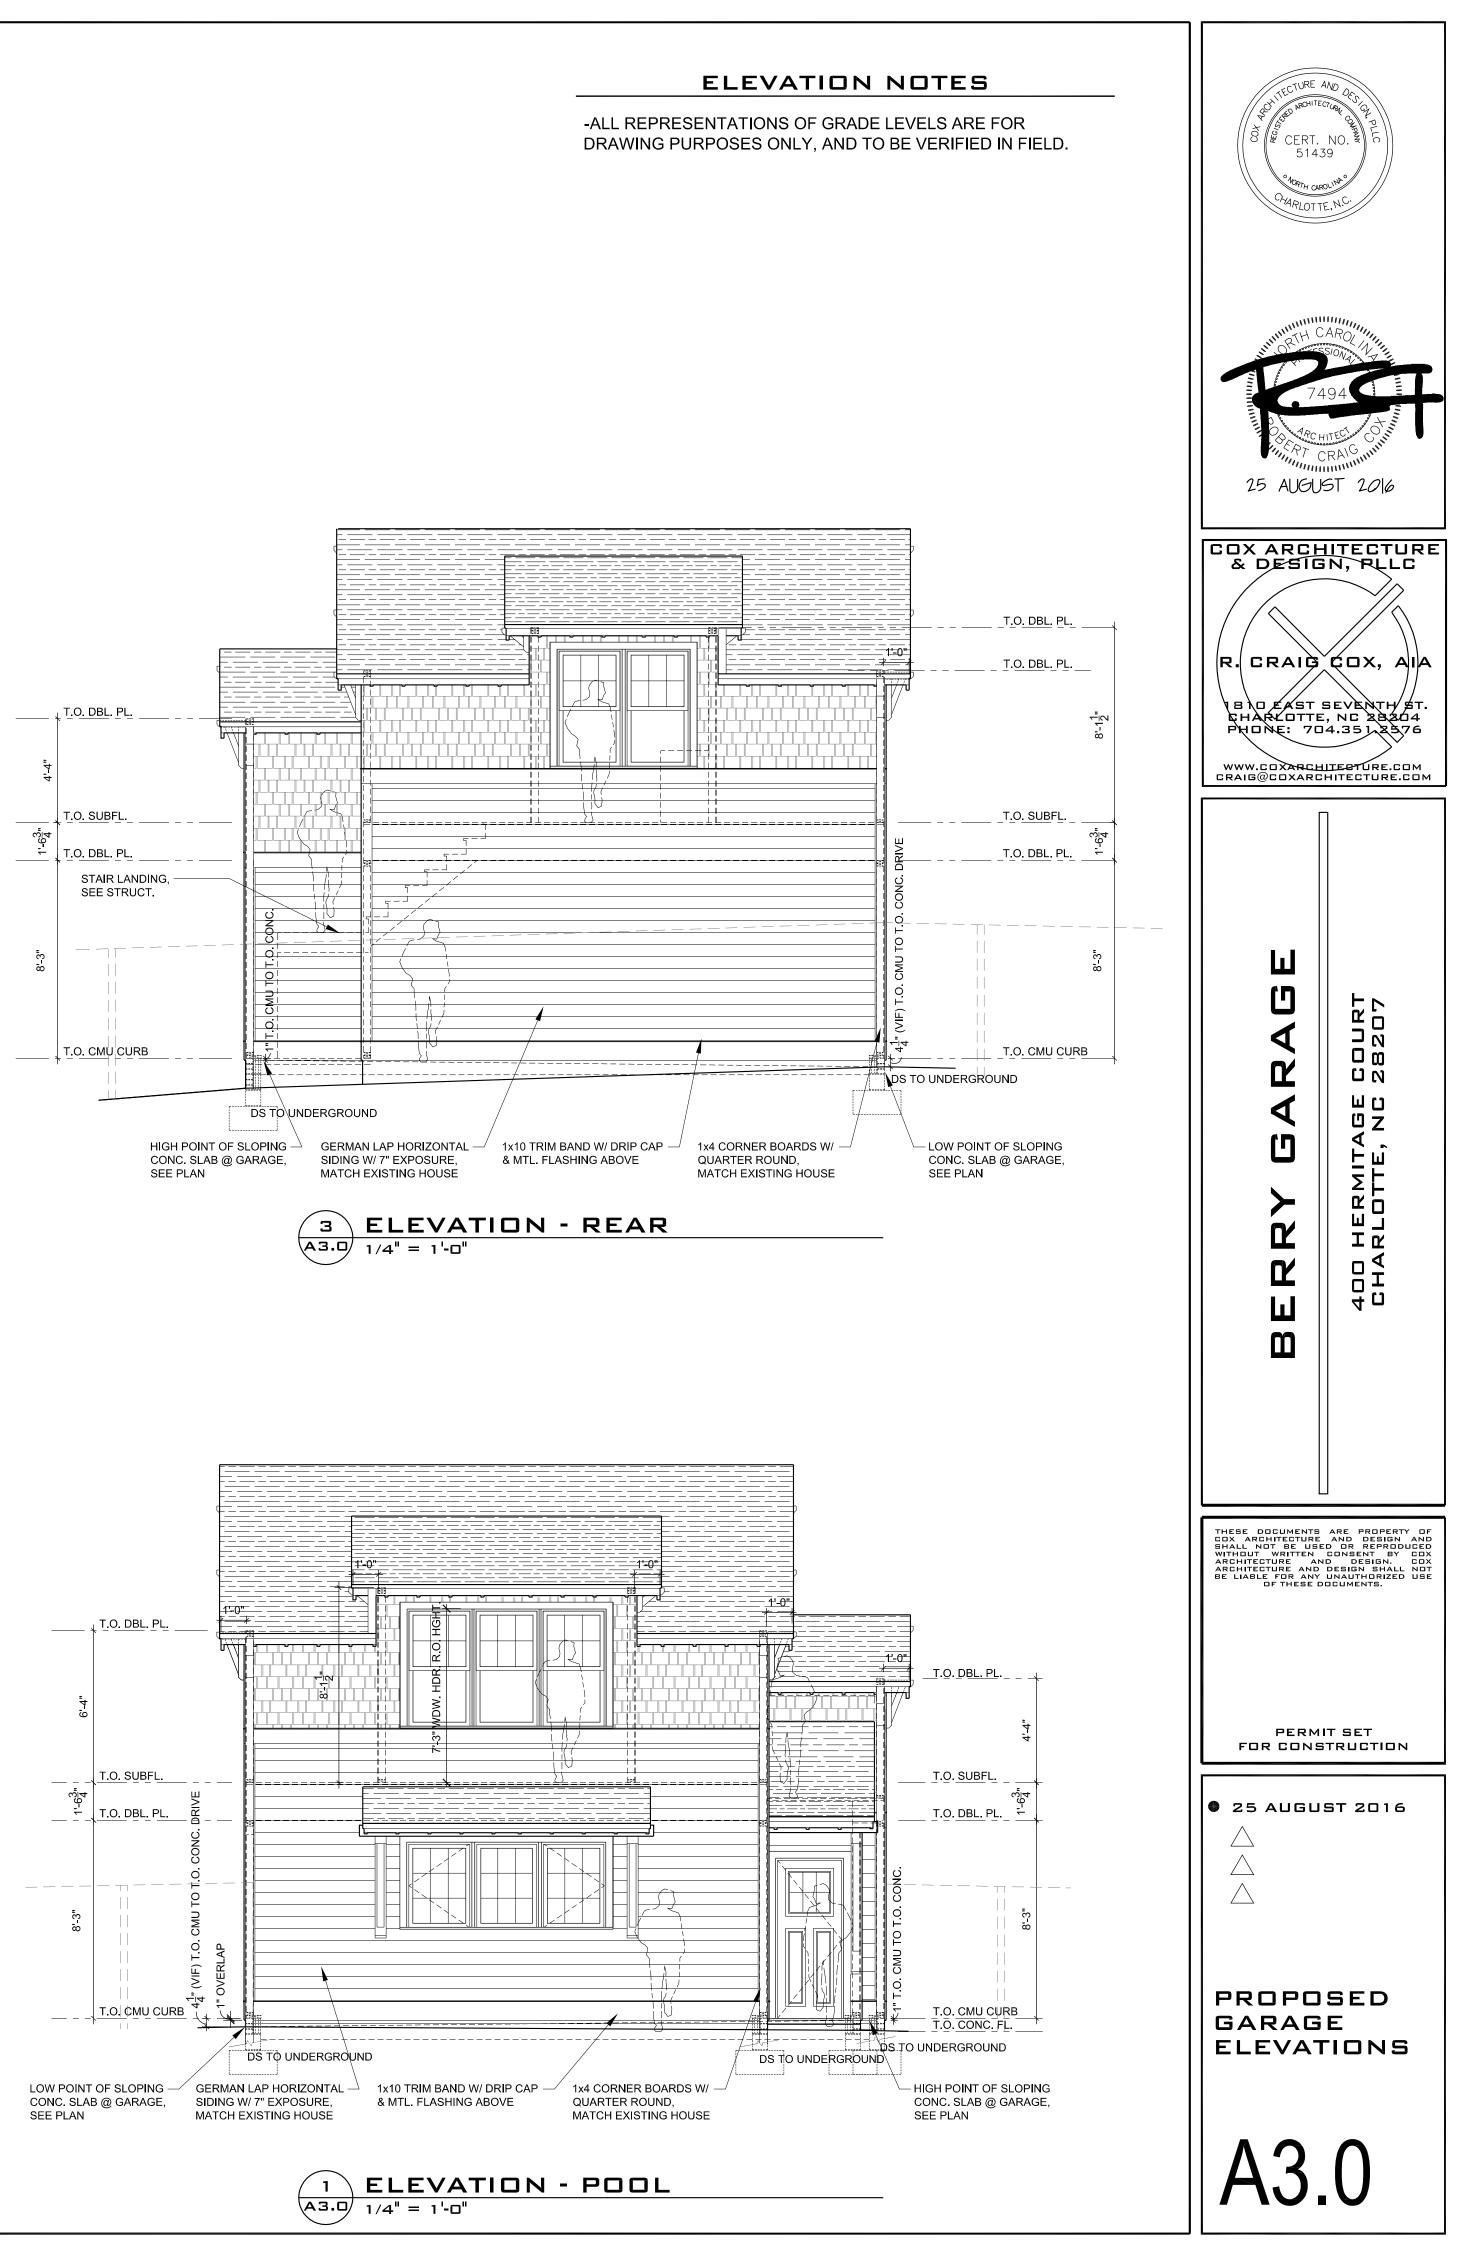











4 ELEVATION - PROVIDENCE RD.

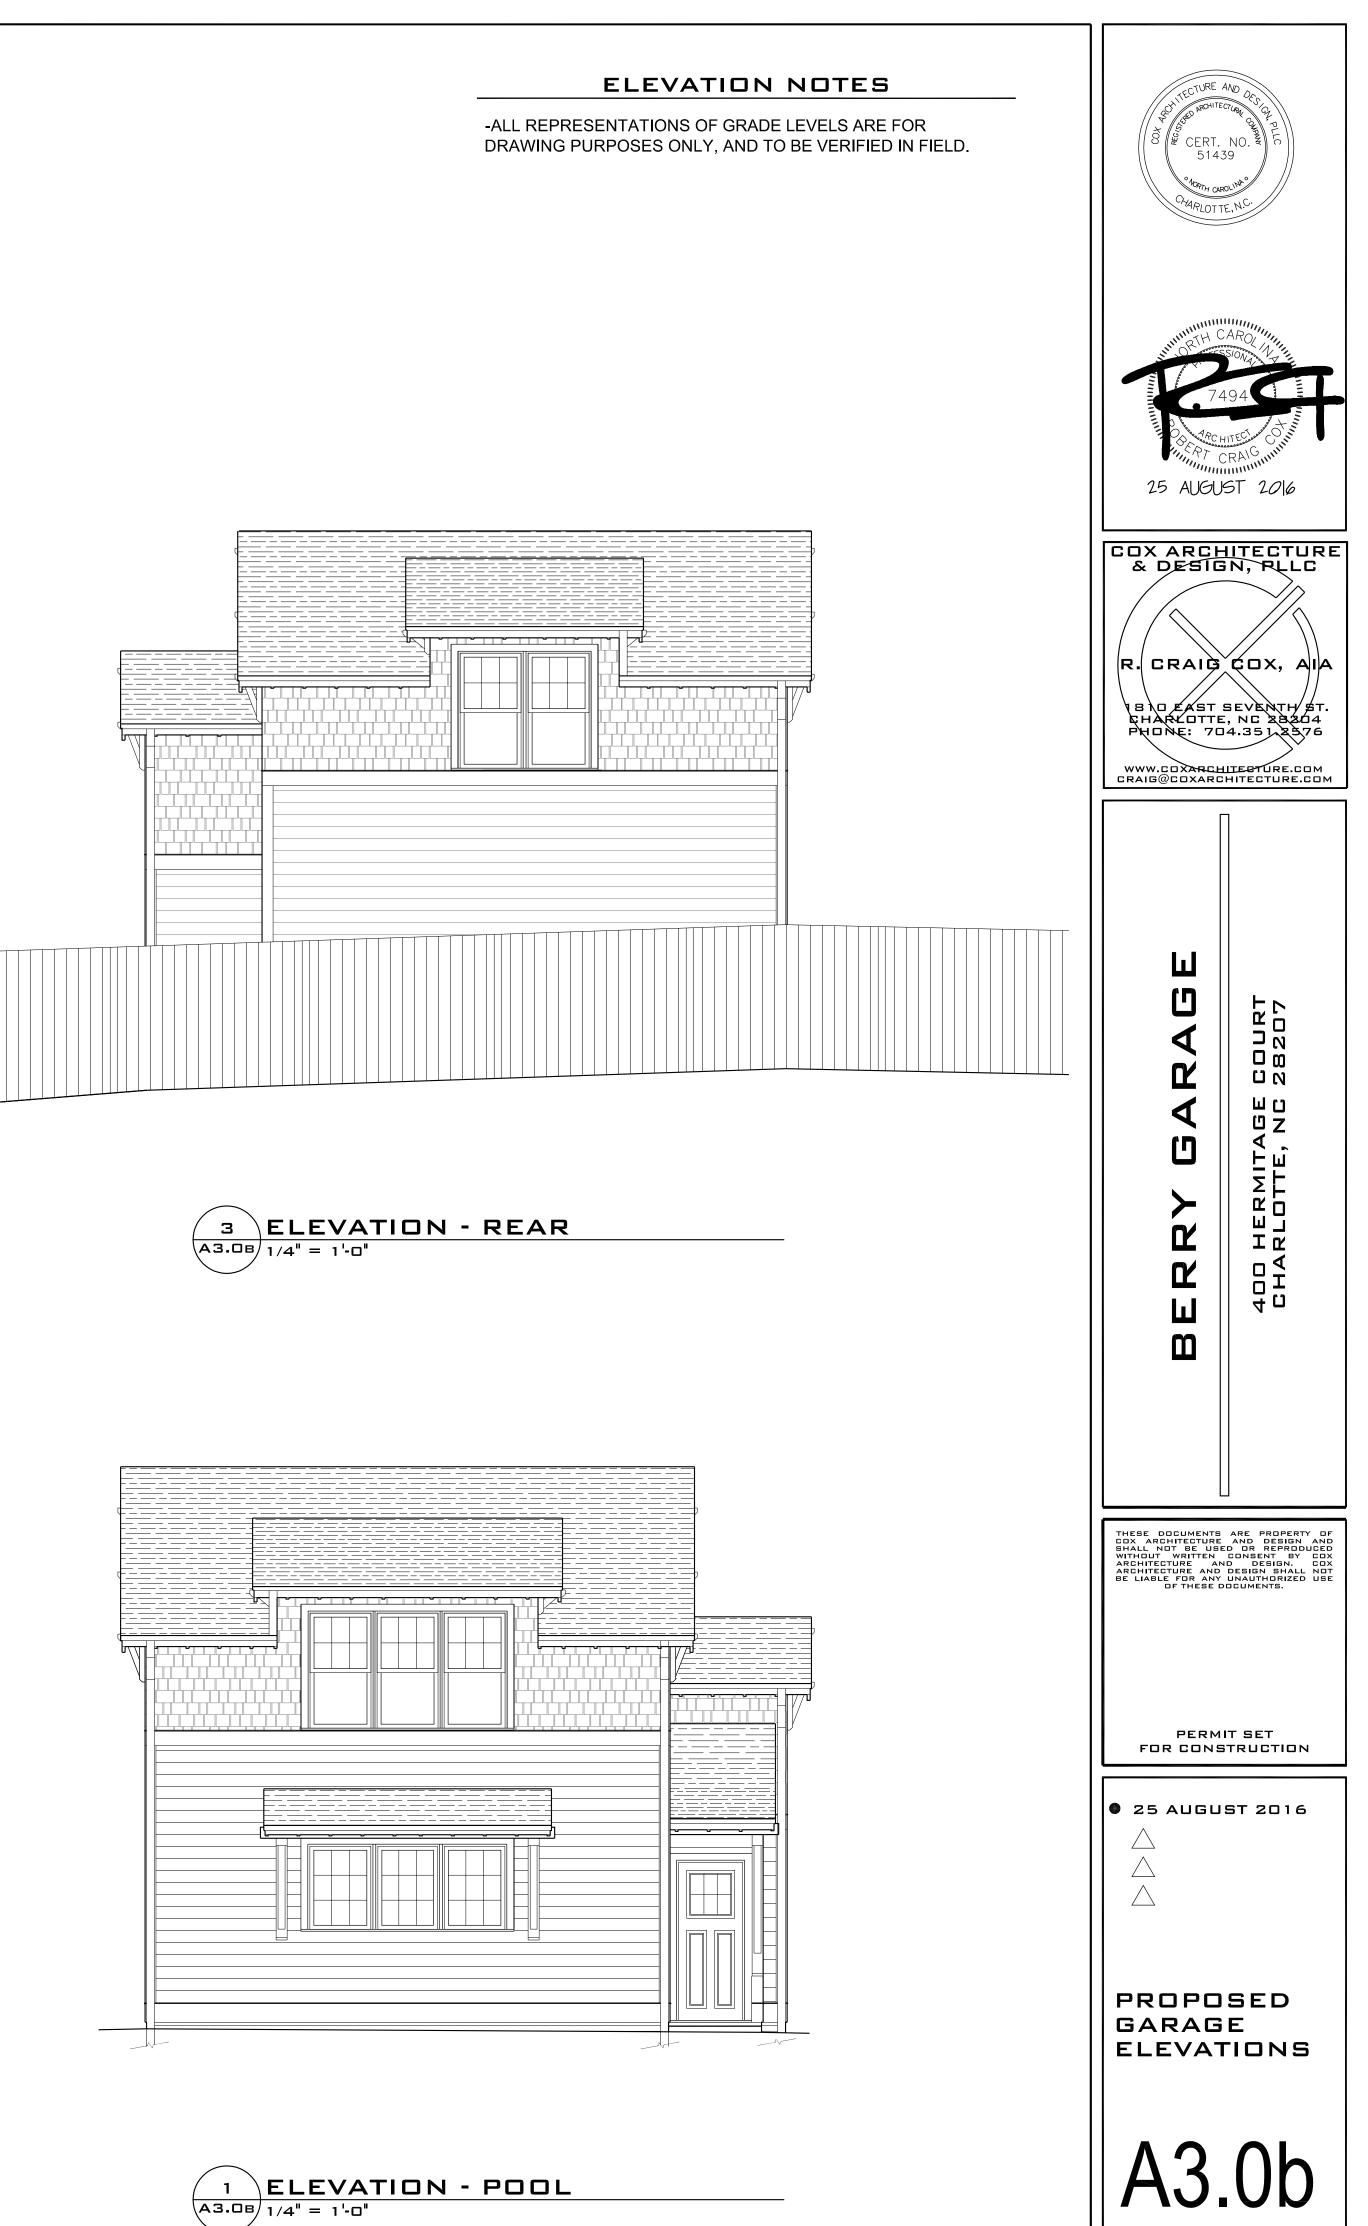

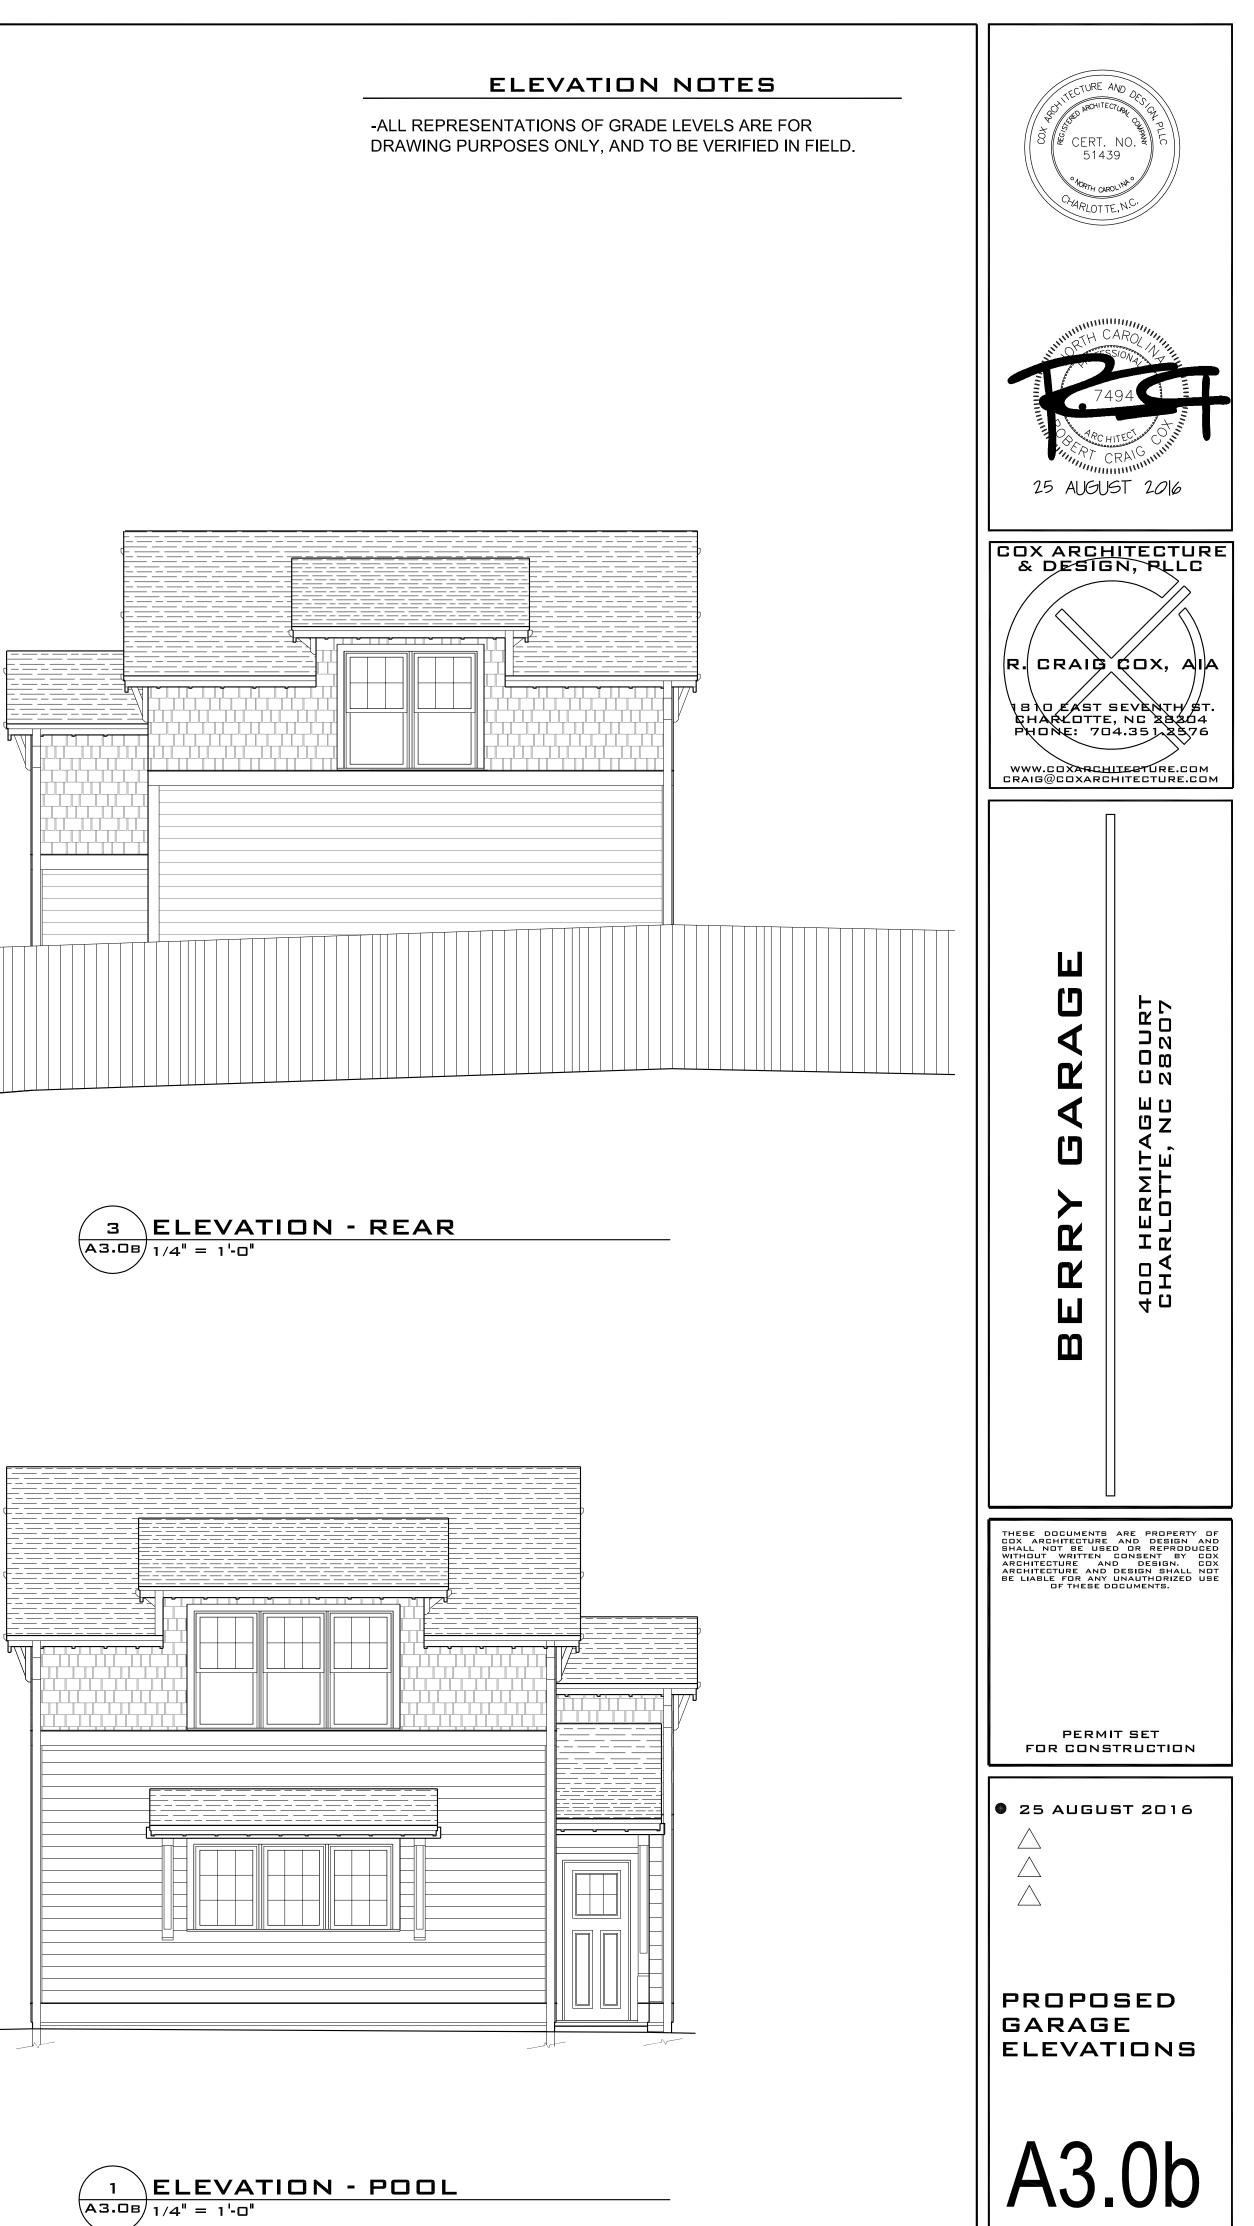





-CONTRACTORS TO FIELD VERIFY ALL DIMENSIONS & NOTIFY ARCHITECT OF ANY DISCREPANCIES, ERRORS OR OMISSIONS PRIOR TO EXECUTION OF WORK. -CLEANUP TO OCCUR DAILY.

-G.C. TO VERIFY FINISH GRADE @ HOUSE TO DETERMINE NUMBER OF STEPS.

-G.C. TO SUPPLY RECESSED DRYER VENT BOX -DRYERBOX MODEL #DB-425 OR EQUAL.

-MECHANICAL CONTRACTOR TO COORDINATE W/ ARCHITECT LOCATION OF MAIN TRUNK & DISTRIBUTION LINES, REGISTERS (CENTER ALL REGISTERS ON WINDOWS), THERMOSTATS, AIR HANDLER & CONDENSERS. -INSULATE ALL INTERIOR BATHROOM W/ SOUND ATTENUATION BATT. INSULATION

-CEILING HEIGHTS LISTED ARE DIMENSIONED TO FRAMING (TOP OF SUBFLOOR TO UNDERSIDE OF FRAMING ABOVE)

-SEE ELEC. PLAN FOR GAS CONNECTIONS, HOSE BIBBS, TANKLESS WATER HEATERS, A/C UNITS, ETC.

FLOOR PLAN LEGEND

5S	5 SHELVES
1R 2S	1 ROD, 2 SHELVES
2R 2S	2 ROD, 2 SHELVES
HR	HANGING ROD
CO	CASED OPENING
W/D	WASHER, DRYER
DW	DISH WASHER
FRIG	REFRIGERATOR
LS	LAZY SUSAN
М	MIRROR
	SHOWER HEAD
(RH)	RAIN HEAD
\smile	

WALL SCHEDULE

2X FRAMED WALLS _____ OVERHEAD/BELOW _ _ _ _ _ _ _

BRICK VENEER

DOOR & WINDOW LEGEND

<u>30 96</u>

HEIGHT: 8'-0" WIDTH: 2'-6"

DOORS: WINDOWS: P = POCKET A = AWNING C = CASEMENT F = FIXED DH = DOUBLE HUNG

DOOR NOTES

-ALL INTERIOR DOORS TO BE 2 PANEL SOLID CORE DOORS (UNO), ARCHITECT TO APPROVE FINAL SELECTION PRIOR TO FINALIZING ORDER -TOP OF INTERIOR CASING @ ADJACENT DOORS & WINDOWS TO ALIGN WHEN HEADER CALL OUTS ARE EQUAL

WINDOW NOTES

-ALL WINDOW DIMENSIONS ARE BASED ON SIERRA PACIFIC ROUGH OPENING CALL OUTS. IF DIFFERENT MANUFACTURER IS SELECTED, THEN FINAL SELECTION OF WINDOW SIZES ARE TO BE APPROVED BY ARCHITECT.

-WINDOWS TO BE INSTALLED BY CERTIFIED WINDOW INSTALLER PER MANUFACTURER'S INSTALLATION INSTRUCTIONS.

-WINDOW SUPPLIER TO SPECIFY & ORDER TEMPERED GLASS IN WINDOWS AS REQ'D BY LOCAL CODE.

-G.C. AND WINDOW SUPPLIER TO VERIFY THAT EACH BEDROOM TO HAVE A MINIMUM OF ONE WINDOW WHICH MEETS EMERGENCY EGRESS AS REQUIRED BY NORTH CAROLINA (INTERNATIONAL RESIDENTIAL CODE). WINDOW SUPPLIER TO ADD EGRESS HARDWARE TO CASEMENT WINDOWS IF NECESSARY. -TOP OF INTERIOR CASING @ ADJACENT DOORS & WINDOWS TO ALIGN WHEN HEADER CALL OUTS ARE EQUAL

STAIR NOTES

-STAIR FABRICATOR / INSTALLER TO VERIFY THAT STAIRS MEET ALL REQ'D CODES

-ADJUSTMENTS TO STAIR TO BE CONFIRMED W/ ARCHITECT PRIOR TO STAIR CONSTRUCTION

SQUARE FOOTAGES

GARAGE FLOOR SECOND FLOOR (UNFINISHED)

= 556 sf

= 489 sf

4'-10<u>7</u>" ГД ----4'-105"

