

Rezoning Transportation Analysis

Petition Number: 2018-165

General Location Identifier: 16719305

From: Felix Obregon, PE
fobregon@charlottenc.gov
704-432-5729

Reviewer: Carlos Alzate
clazate@charlottenc.gov
704-432-0672

Revision Log:

Date	Description
01-18-19	First Review
02-18-19	Second Review

General Review Information

The site is on Forest Point Boulevard (major collector) and is located in a corridor outside Route 4.

CDOT's review of this rezoning petition is intended to ensure consistency with the Transportation Action Plan (TAP) which seeks to ensure that the City's transportation network supports current and future land uses and includes streets that provide safe and comfortable mobility for motorists, pedestrians, bicyclists, and transit users.

This document is primarily for communication to Planning Department staff as part of the overall City staff analysis of the rezoning petition and includes an overall summary of the case from a transportation perspective, information on trip generation, and resolved or outstanding site plan concerns. Additional advisory information about the driveway permit process is provided for information only.

Based on our review of the petition, we offer the following information for your consideration.

Transportation Summary

The site is located on a major collector. The site plan commits to streetscape improvements along the site frontage in the form of 8-foot planting strip and 6-foot sidewalk. CDOT continues to request pedestrian improvements at the intersection of Forest Point Boulevard and Arrowood Road to support the increase in pedestrian traffic the site will generate.

Trip Generation

Scenario	Land Use	Intensity	Trip Generation (vehicle trips/day)	Source
Existing Use	Vacant	N/A	0	Tax Record
Entitlement with Current Zoning	Office	15,000 sf	2,220	RZ 2006-135
	Fast Food Restaurant with Drive-thru	3,500 sf		
	Motel	121 rooms		
Proposed Zoning	Apartments	200 dwellings	1,470	Site Plan: 02-11-19

Outstanding Issues

~~Strikeout~~ = Not an outstanding issue


- ~~1. **Traffic Study** A Traffic Impact Study/Transportation Technical Memorandum is not necessary for the complete review of this petition.~~

Rezoning Transportation Analysis

Petition Number: 2018-165

General Location Identifier: 16719305

2. The petitioner shall revise the site plan and conditional note to commit to pedestrian improvements for the intersection of Forest Point Boulevard and West Arrowood Road. This improvement is required to mitigate the additional pedestrian traffic that will be generated by the development.
3. ~~I-77 is identified to be widened in the future. A preliminary study was completed showing the possible lane configuration. The petitioner should revise the site plan and conditional notes to show the future right-of-way as this may affect the site layout. The petitioner should commit to dedicating the right-of-way. In addition, the right of way should be labeled and dimensioned from the road centerline.~~

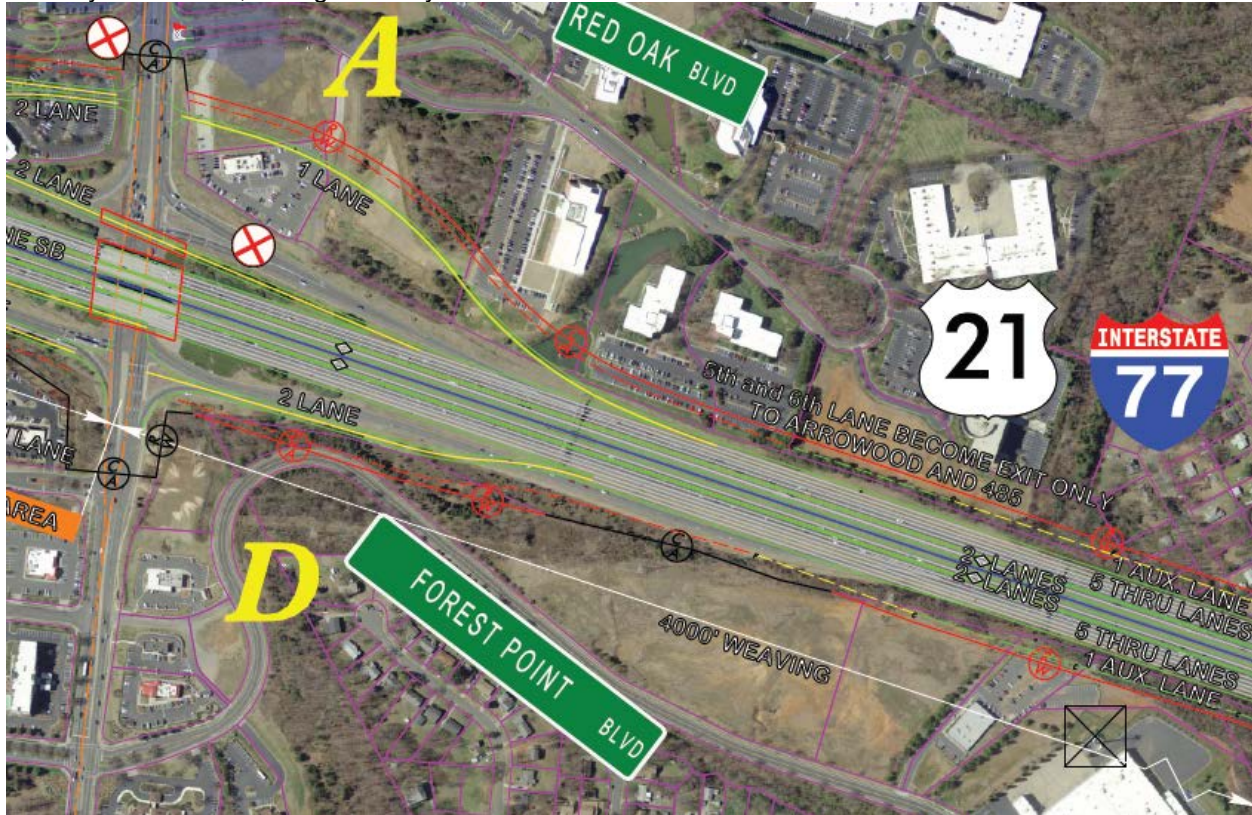

4. ~~The petitioner should revise the site plan to add a note specifying all transportation improvements will be approved and constructed before the site's first building certificate of occupancy is issued. The petitioner may phase transportation improvements if said improvements and phasing are explicitly described in site plan notes.~~
5. ~~Resolved~~ Sample format for comment that is resolved

Advisory Information

The following are requirements of the developer that must be satisfied prior to driveway permit approval. We recommend that the petitioner reflect these on the rezoning plan as-appropriate.

1. According to the City of Charlotte's Driveway Regulations, CDOT has the authority to regulate/approve all private street/driveway and public street connections to the right-of-way of a street under the regulatory jurisdiction of the City of Charlotte.
2. Adequate sight triangles must be reserved at the existing/proposed street entrance(s). Two 35' x 35' sight triangles (and two 10' x 70' sight triangles on North Carolina Department of Transportation on NCDOT maintained streets) are required for the entrance(s) to meet requirements. All proposed

Rezoning Transportation Analysis

Petition Number: 2018-165

General Location Identifier: 16719305

trees, berms, walls, fences, and/or identification signs must not interfere with sight distance at the entrance(s). Such items should be identified on the site plan.

3. The proposed driveway connection(s) to public streets will require a driveway permit(s) to be submitted to CDOT (and the North Carolina Department of Transportation on NCDOT maintained streets) for review and approval. The exact driveway location(s) and type/width of the driveway(s) will be determined by CDOT during the driveway permit process. The locations of the driveway(s) shown on the site plan are subject to change in order to align with driveway(s) on the opposite side of the street and comply with City Driveway Regulations and the City Tree Ordinance.
4. All proposed commercial driveway connections to a future public street will require a driveway permit to be submitted to CDOT for review and approval.
5. Any fence or wall constructed along or adjacent to any sidewalk or street right-of-way requires a certificate issued by CDOT.
6. A Right-of-Way Encroachment Agreement is required for the installation of any non-standard item(s) (irrigation systems, decorative concrete pavement, brick pavers, etc.) within a proposed/existing City maintained street right-of-way by a private individual, group, business, or homeowner's/business association. An encroachment agreement must be approved by CDOT prior to the construction/installation of the non-standard item(s). Contact CDOT for additional information concerning cost, submittal, and liability insurance coverage requirements.