

Rezoning Transportation Analysis

Petition Number: 2019-008

General Location Identifier: 08109921

From: Felix Obregon, PE
fobregon@charlottenc.gov
704-432-5729

Reviewer: Molly T Haynes
molly.haynes@charlottenc.gov
704-336-1496

Revision Log:

Date	Description
01-31-2019	First Review

General Review Information

The site is at the unsignalized intersection of E 15th Street (local) & Seigle Avenue (minor thoroughfare) and is located in a wedge inside Route 4. The site is within the limits of the Belmont Area Revitalization Plan.

CDOT's review of this rezoning petition is intended to ensure consistency with the Transportation Action Plan (TAP) which seeks to ensure that the City's transportation network supports current and future land uses and includes streets that provide safe and comfortable mobility for motorists, pedestrians, bicyclists, and transit users.

This document is primarily for communication to Planning Department staff as part of the overall City staff analysis of the rezoning petition and includes an overall summary of the case from a transportation perspective, information on trip generation, and resolved or outstanding site plan concerns. Additional advisory information about the driveway permit process is provided for information only.

Based on our review of the petition, we offer the following information for your consideration.

Transportation Summary

To be provided prior to public hearing.

Trip Generation

Scenario	Land Use	Intensity	Trip Generation (vehicle trips/day)	Source
Existing Use	Single Family	3 dwellings	30	Tax Record
Entitlement with Current Zoning	Single Family	3 dwellings	30	Tax Record
Proposed Zoning	Apartments Retail	35 dwellings 1,500 sf	540	Site Plan: no date provided

Outstanding Issues

~~Strikeout~~ = Not an outstanding issue


1. **Curbline** The proposed zoning district has a setback measured from back of the existing or proposed future curbline. The existing back of curb is in the correct future location for Seigle Avenue.
2. **Traffic Study** ~~A Traffic Impact Study/Transportation Technical Memorandum is not necessary for the complete review of this petition.~~

Rezoning Transportation Analysis


Petition Number: 2019-008

General Location Identifier: 08109921

3. Seigel Avenue is an existing minor thoroughfare which requires 60' of right-of-way. This site requires 30' right-of-way dedication measured from the centerline of Seigel Avenue. The petitioner shall revise the site plan to show, label, and dimension the future back of curb from the centerline.
4. The petitioner shall revise the conditional note(s) to commit to the construction of the two ADA ramps at the corner of Seigel Avenue and East 15th Street.

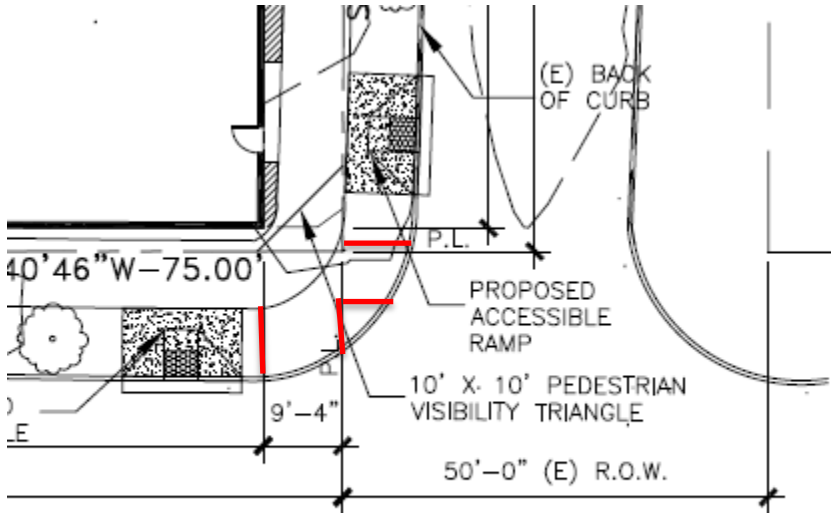

5. The petitioner should rebuild the receiving ramps at the corner of Seigel Avenue and East 15th Street to meet City of Charlotte and PROWAG standards.

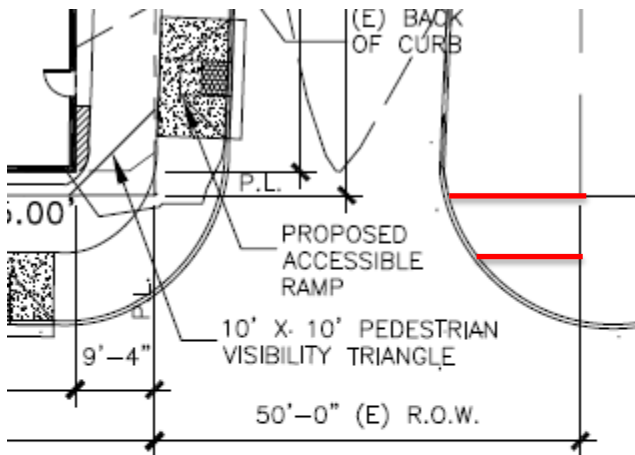

Rezoning Transportation Analysis

Petition Number: 2019-008

General Location Identifier: 08109921

6. The petitioner should revise the site plan to add a note specifying dedication and fee simple conveyance of all rights of way to the City before the site's first building certificate of occupancy is issued. CDOT requests right of way set at 2' behind back of sidewalk where feasible.
7. The petitioner should revise the site plan to add a note specifying all transportation improvements will be approved and constructed before the site's first building certificate of occupancy is issued. The petitioner may phase transportation improvements if said improvements and phasing are explicitly described in site plan notes.

Advisory Information

The following are requirements of the developer that must be satisfied prior to driveway permit approval. We recommend that the petitioner reflect these on the rezoning plan as-appropriate.

1. The setback for this district is measured from the back of the existing or future curbline as determined by CDOT and Planning during the permitting process.
2. According to the City of Charlotte's Driveway Regulations, CDOT has the authority to regulate/approve all private street/driveway and public street connections to the right-of-way of a street under the regulatory jurisdiction of the City of Charlotte.
3. Adequate sight triangles must be reserved at the existing/proposed street entrance(s). Two 35' x 35' sight triangles (and two 10' x 70' sight triangles on North Carolina Department of Transportation on NCDOT maintained streets) are required for the entrance(s) to meet requirements. All proposed trees, berms, walls, fences, and/or identification signs must not interfere with sight distance at the entrance(s). Such items should be identified on the site plan.
4. The proposed driveway connection(s) to public streets will require a driveway permit(s) to be submitted to CDOT (and the North Carolina Department of Transportation on NCDOT maintained streets) for review and approval. The exact driveway location(s) and type/width of the driveway(s) will be determined by CDOT during the driveway permit process. The locations of the driveway(s) shown on the site plan are subject to change in order to align with driveway(s) on the opposite side of the street and comply with City Driveway Regulations and the City Tree Ordinance.
5. All proposed commercial driveway connections to a future public street will require a driveway permit to be submitted to CDOT for review and approval.
6. Any fence or wall constructed along or adjacent to any sidewalk or street right-of-way requires a certificate issued by CDOT.
7. A Right-of-Way Encroachment Agreement is required for the installation of any non-standard item(s) (irrigation systems, decorative concrete pavement, brick pavers, etc.) within a proposed/existing City maintained street right-of-way by a private individual, group, business, or homeowner's/business association. An encroachment agreement must be approved by CDOT prior to the construction/installation of the non-standard item(s). Contact CDOT for additional information concerning cost, submittal, and liability insurance coverage requirements.