Rezoning Transportation Analysis

Petition Number: 2018-044

General Location Identifier: 22328111

From: Felix Obregon, PE

fobregon@charlottenc.gov 704-432-5729

Reviewer:

Carlos Alzate calzate@charlottenc.gov 704-432-0672

Revision Log:	Date	Description	
	04-20-18	First Review	
	06-14-18	Second Review	

General Review Information

The site is on Elm Ln (major collector) and is located in a wedge outside Route 4.

CDOT's review of this rezoning petition is intended to ensure consistency with the Transportation Action Plan (TAP) which seeks to ensure that the City's transportation network supports current and future land uses and includes streets that provide safe and comfortable mobility for motorists, pedestrians, bicyclists, and transit users.

This document is primarily for communication to Planning Department staff as part of the overall City staff analysis of the rezoning petition and includes an overall summary of the case from a transportation perspective, information on trip generation, and resolved or outstanding site plan concerns. Additional advisory information about the driveway permit process is provided for information only.

Based on our review of the petition, we offer the following information for your consideration.

Transportation Summary

The site is located on a major collector road. The site plan commits to improving pedestrian access by installing a pedestrian refuge island on Elm Ln and providing a sidewalk connection from the site to Camfield Street.

Scenario	Land Use	Intensity	Trip Generation (vehicle trips/day)	Source
Existing Use	Vacant	N/A	0	Tax Record
Entitlement with Current Zoning	Single Family (7.5 acres of R-3)	22 dwellings	260	General Guidance from Planning
Proposed Zoning	Townhomes	64 dwellings	440	Site Plan: 03-21-18
	Townhomes	61 dwellings	420	Site Plan: 06-11-18

Trip Generation

Outstanding Issues


Strikeout = Not an outstanding issue 1. Curbline The proposed zoning district has a setback measured from back of the existing or proposed future curbline. The location of the future back of curb is 24 feet from centerline of the road.

2. Traffic Study A Traffic Impact Study/Transportation Technical Memorandum is not necessary for the complete review of this petition.

Rezoning Transportation Analysis

Petition Number: 2018-044 General Location Identifier: 22328111

- 3. The petitioner should revise the site plan and conditional notes to show the curb and gutter set in its future location to accommodate the north bound left turn lane, thru lane and a 5' bike lane on Elm Ln at the proposed entrance.
- 4. The petitioner should revise the site plan and conditional notes to show a pedestrian refuge island on Elm Ln and the north most driveway of parcel #22328111.

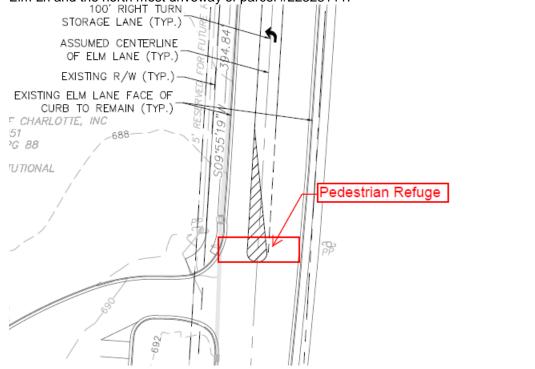

- 5. The petitioner should revise the site plan and conditional notes to show the proposed street connecting to Elm Ln to be public as it connects to a major collector and would allow future access for the 2 church properties.
- 6. The petitioner should revise the site plan and conditional notes to show 8' planting strip and 6' sidewalk on the proposed street connecting to Elm Ln.
- 7. The petitioner should revise the site plan and conditional notes to show a pedestrian and bike connection to Camfield St.
- 8. The petitioner should revise the site plan to add a note specifying dedication and fee simple conveyance of all rights of way to the City before the site's first building certificate of occupancy is issued. CDOT requests right of way set at 2' behind back of sidewalk where feasible.
- 9. The petitioner should revise the site plan to add a note specifying all transportation improvements will be approved and constructed before the site's first building certificate of occupancy is issued. The petitioner may phase transportation improvements if said improvements and phasing are explicitly described in site plan notes.

Advisory Information

The following are requirements of the developer that must be satisfied prior to driveway permit approval. We recommend that the petitioner reflect these on the rezoning plan as-appropriate.

Rezoning Transportation Analysis

Petition Number: 2018-044

General Location Identifier: 22328111

- 1. According to the City of Charlotte's Driveway Regulations, CDOT has the authority to regulate/approve all private street/driveway and public street connections to the right-of-way of a street under the regulatory jurisdiction of the City of Charlotte.
- 2. Adequate sight triangles must be reserved at the existing/proposed street entrance(s). Two 35' x 35' sight triangles (and two 10' x 70' sight triangles on North Carolina Department of Transportation on NCDOT maintained streets) are required for the entrance(s) to meet requirements. All proposed trees, berms, walls, fences, and/or identification signs must not interfere with sight distance at the entrance(s). Such items should be identified on the site plan.
- 3. The proposed driveway connection(s) to public streets will require a driveway permit(s) to be submitted to CDOT (and the North Carolina Department of Transportation on NCDOT maintained streets) for review and approval. The exact driveway location(s) and type/width of the driveway(s) will be determined by CDOT during the driveway permit process. The locations of the driveway(s) shown on the site plan are subject to change in order to align with driveway(s) on the opposite side of the street and comply with City Driveway Regulations and the City Tree Ordinance.
- 4. All proposed commercial driveway connections to a future public street will require a driveway permit to be submitted to CDOT for review and approval.
- 5. Any fence or wall constructed along or adjacent to any sidewalk or street right-of-way requires a certificate issued by CDOT.
- 6. A Right-of-Way Encroachment Agreement is required for the installation of any non-standard item(s) (irrigation systems, decorative concrete pavement, brick pavers, etc.) within a proposed/existing City maintained street right-of-way by a private individual, group, business, or homeowner's/business association. An encroachment agreement must be approved by CDOT prior to the construction/installation of the non-standard item(s). Contact CDOT for additional information concerning cost, submittal, and liability insurance coverage requirements.