

DEVELOPMENT STANDARDS

Unless more stringent standards are established by the Rezoning Site Plan or these Development Standards, all development standards established under the City of Charlotte Zoning Ordinance (the "Ordinance") for the MX-2 zoning district classification shall be followed in connection with development taking place on the Site subject to the Innovative development provisions outlined on the Rezonina Site Sheet.

STATEMENTS WITH RESPECT TO THE GRAPHICS WHICH ARE SET FORTH ON EXHIBITS ACCOMPANYING THE REZONING SITE

The ultimate layouts of the development proposed for the Site, the exact alignments of streets and points of access, the configurations and placements of parking areas and the precise locations, heights and masses of buildings and other individual site elements to be constructed have not been determined. As a consequence, the graphics and building elevations which accompany the Rezoning Site Plan are schematic in nature and are not to be considered as final specific site development plans but rather as preliminary graphic representations of the types and quality of development proposed, it being understood that the exact configurations and placements of streets, driveways, parking areas, buildings and other individual site elements may be altered or modified within the limits prescribed by the Rezoning Site Plan and the Ordinance during the design development and construction phases. All such changes are subject to the normal review processes. Without limiting the generality of the foregoing, buildings generally depicted on the Rezoning Site Plan may be combined or separated provided that the maximum number of buildings may not be increased above the number of buildings generally depicted on the Rezoning Site Plan.

PERMITTED USES:

The Site may be developed with up to 78 for sale, single family attached dwelling units, together with any incidental or accessory uses associated therewith which are permitted under the Ordinance by right or under prescribed conditions in the MX-2 Zoning District including but not limited to temporary sales center(s).

- The number of access points to and from the Site shall be limited to those shown on the Rezoning Site Plan.
- Access points shall be located in the general areas depicted on this Rezoning Site Plan. The final location of each access point is subject to any modifications required to accommodate final site and construction plans/design, and site/topographic constraints, and to any adjustments required for approval by the Charlotte Department of Transportation and/or the North Carolina Department of Transportation.
- The Petitioner agrees to dedicate and convey (by quitclaim deed and subject to a reservation for any necessary utility easements) prior to the issuance of any building permit those portions of the Site immediately abutting the following roadways as required to provide right of way as outlined below if such right-of-way does not presently exist:

MAY 25 2006

- The Petitioner shall install a left turn lane on McKee Road into the Site with a minimum of 150 feet of storage, a 15:1 bay taper and 45:1 through lane tapers.
- Specialty paving materials may be permitted within public and/or private streets internal to the Site subject to any necessary review and approval by CDOT.

DESIGN GUIDELINES:

ARCHITECTURAL TREATMENT

- The primary exterior building materials to be employed in the construction of the single family attached dwelling units shall be masonry and cement fiber board (i.e. Hardi-Plank). A minimum of 50% of the front elevation of each dwelling unit will consist of masonry materials.
- The elevations of the buildings along McKee Road shall be substantially similar to the attached renderings.

YARD RESTRICTIONS AND BUFFER REQUIREMENTS

- Building setbacks and yards will be established in the manner depicted on the Rezoning Site Plan.
- Class C buffers shall be provided along the eastern and southern edges of the Site boundary. The site development may require grading within a portion of the buffers. However, once the buffers have been established, they will remain undisturbed. The Petitioner reserves the right to reduce the width of some or portions of these buffers by up to 25 percent in accordance with Section 12.302 (8) of the Ordinance.
- A Class C buffer shall be provided along the western edge of the Site boundary in the manner generally shown on the Rezoning Site Plan. This buffer is one-half of the buffer required by the adjoining church use. The buffer required by the church is 48 feet and therefore a 24 foot buffer is required on the western edge of the Site. The Petitioner reserves the right to reduce the width of this buffer by 25 percent to 18 feet in accordance with Section 12.302 (8) of the Ordinance.
- (4) In the event that an adjacent parcel is either rezoned to a zoning district or devoted to a use that eliminates or reduces the buffer requirements on the eastern or western edges of the Site, then the Petitioner may reduce or eliminate, as the case may be, the eastern and/or western edge buffers set out on the Rezoning Site Plan accordingly. In no event however shall the buffer along I-485 be eliminated or reduced.

OFF STREET PARKING

Off street parking shall meet the minimum standards established under the Ordinance.

- STORM WATER MANAGEMENT
- Surface level storm water detention, if required, shall not be located within the required setbacks or buffers.
- Water quality best management practices (BMP's) will be incorporated into the Site to achieve 85% Total Suspended Solid removal for the entire post-development runoff volume for the runoff generated from the first 1-inch of rainfall. BMPs must be designed and constructed in accordance with the N.C. Department of Environment and Natural Resources (NCDENR) Best Management Practices Manual, April 1999, Section 4.0. (Design Standards shall be met according to the City of Charlotte Best Management Practices Manual, when available). Use of Low Impact Development (LID) techniques is optional.
- The Petitioner shall control the entire volume for the 1-year, 24-hour storm. Runoff volume drawdown time shall be a minimum of 24 hours, but not more than 120 hours. The peak shall be controlled to match the predevelopment runoff rates for the 10-year and 25-year, 6-hour storms or, in the alternative, the Petitioner can perform a downstream analysis to determine whether peak control is needed, and if so, for what level of storm frequency.
- The Petitioner shall have the receiving drainage system analyzed to ensure that it will not be taken out of standard due to the development. If it is found that the development will cause the storm drainage system to be taken out of standard, the petitioner shall provide alternate methods to prevent this from occurring.
- A 6 foot wide sidewalk and an 8 foot wide planting strip will be installed along the Site's frontage on McKee
- The Petitioner will provide internal sidewalks substantially in the locations depicted on the Rezoning Site Plan and in conformance with the Ordinance.

TREE SAVE /OPEN SPACE

- A minimum of 17.5 percent of the site will be devoted to tree save area(s). The exact locations of the tree save area(s) will be determined through the subdivision review process.
- Development of the Site shall include common open space areas in the general locations shown on the Rezoning Site Plan.

LANDSCAPING AND SCREENING

- Landscaping and screening shall, at a minimum, satisfy the requirements of Section 12.303 of the
- Landscaping will be installed in stages in accordance with the Ordinance as the Site is developed.
- It is contemplated that garbage disposal shall be handled by way of roll out cans and pick up by a private service. If dumpsters or trash receptacle corrals are installed on the Site, they will be screened with solid enclosures with gates. Pursuant to Section 12.403 of the Ordinance, if public trash collection is provided to the Site, any required dumpsters, trash receptacles and recycling facilities will be located in the areas generally depicted on the Rezoning Site Plan, provided, however, other improvements, such as parking and landscaping areas may be located in such areas if the private roll-out trash collection is used.

LDIN О Ы W NC CHARLO NDMARK

H

0

H

RO

KE

Résource Group

Charlotte, NC 28208 704.343.0608 fax 704.358.3093 www.drgrp.com Landscape Architecture

1230 West Morehead Street, Suite 214

- ·Urban Design
- · Civil Engineering
- ·Land Planning






Copyright © 200 Design Resource Group, PA This plan or drawing and any accompanying documents or colculations are the property of Design Resource Group, P and are intended solely for the use of the recipient noted

No third party use or modification is permitted without written authorization.



Scale: 1"= 60' Date: 20 MAY 2006 Project No.: 185-002 Revisions: 22 MAY 2006 PER CMPC

Sheet

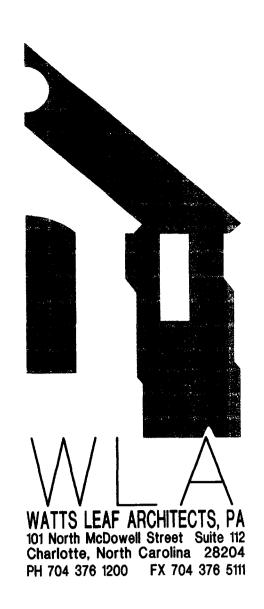



REAR ELEVATION - INTERIOR UNIT

REAR ELEVATION - INTERIOR UNIT

REAR ELEVATION - END UNIT

REAR ELEVATION - END UNIT

PROJECT 0603
DATE 21MAY06
DRAWN BY CEL
CHECKED BY CEL

All
ELEVATIONS

BUILDING EXTERIOR ELEVATIONS ARE CONCEPTUAL. ELEVATIONS MAY VARY ACCORDING TO OPTIONS SELECTED BY INDIVIDUAL BUYERS.